


# Miniature Slide Switches

## Specifications:


Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	non-shorting
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 3 sec, 230° C ± 5° C

Models:	Operating positions	Length (mm)	
		A	B




MFP 120	2	11,0	6,6
MFP 130	3	15,0	10,0
MFP 140	4	18,2	13,2
MFP 150	5	21,4	16,4



MFP 120 – R	2	11,0	6,6
MFP 130 – R	3	15,0	10,0
MFP 140 – R	4	18,2	13,2
MFP 150 – R	5	21,4	16,4



MFP 220	2	13,6	6,9
MFP 230	3	16,8	10,1
MFP 240	4	20,0	13,3
MFP 250	5	23,2	16,5
MFP 260	6	26,4	19,7

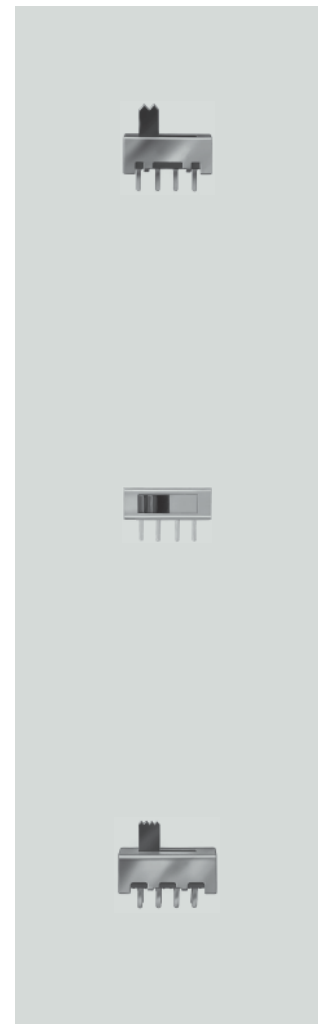


# Miniature Slide Switches

## Specifications:



Contact rating:	30 V DC, 350 mA
Contact resistance:	< 25 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	non-shorting
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 3 sec, 230° C ± 5° C

Models:	Operating positions	Length (mm)	
		A	B

MFP 1370	3	20,0	7,6
MFP 1470	4	20,0	9,9
MFP 1570	5	22,0	12,2

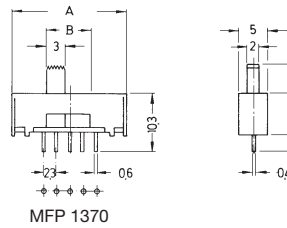

MFP 1370 – R	3	20,0	7,6
MFP 1470 – R	4	20,0	9,9
MFP 1570 – R	5	22,0	12,2

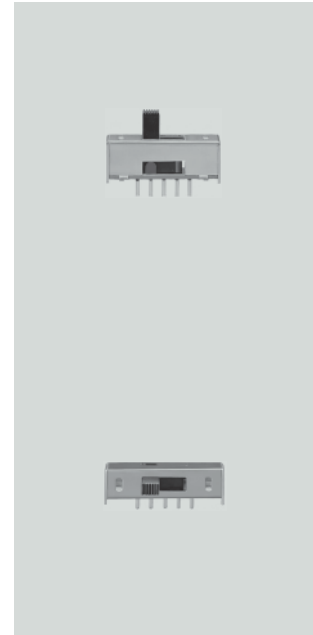



# Miniature Slide Switches

## Specifications:



Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	shorting / non-shorting
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 3 sec, 230° C ± 5° C

Models:	Operating positions	Length (mm)	
		A	B


MFP 1220	2	13,0	7,5
MFP 1320	3	15,5	10,0
MFP 1420	4	18,0	12,5
MFP 1520	5	20,5	15,0
MFP 1620	6	23,0	17,5





MFP 1220 – R	2	13,0	7,5
MFP 1320 – R	3	15,5	10,0
MFP 1420 – R	4	18,0	12,5
MFP 1520 – R	5	20,5	15,0
MFP 1620 – R	6	23,0	17,5



MFP 1323	3	15,5	10,0
MFP 1424	4	18,0	12,5



MFP 1323 – R	3	15,5	10,0
MFP 1424 – R	4	18,0	12,5

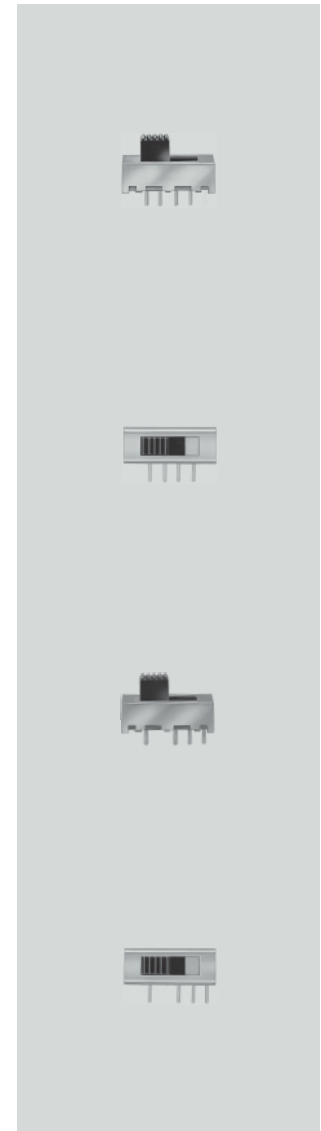



# Miniature Slide Switches




**Specifications:** see page 100

**Material:** plastic housing, terminals sealed

**Models:** Switching functions




MFP 161 D

on on






MFP 261 N

on on






MFP 263 P

on on on








MFP 461 N  
non-shorting

on on



MFP 661 N


on on

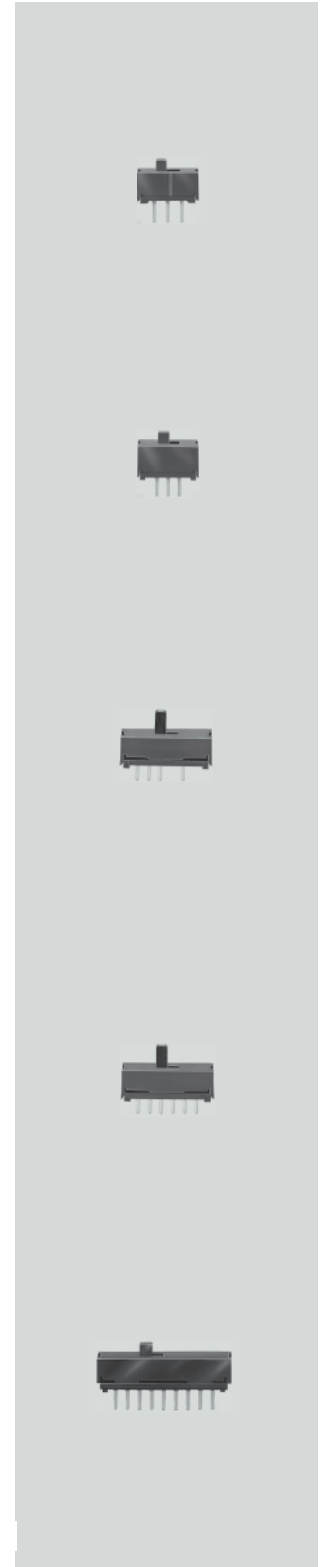


# Miniature Slide Switches

**Models:**                      Switching functions


MFP 261 N – RA            on    on





MFP 263 P – RA            on on on



MFP 461 N – RA            on    on  
non-shorting



MFP 463 P – RA            on on on



# Miniature Slide Switches


## Specifications:

Contact rating:	12 V DC, 100 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 3 sec, 230° C ± 5° C

## Models: Switching functions


MFP 113 D  
non-shorting

on on




MFP 213 N  
non-shorting

on on



MFP 213 P  
shorting

on on on




# Miniature Slide Switches

## Specifications:


Contact rating:	12 V DC, 100 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 3 sec, 230° C ± 5° C

## Models:            Switching functions


MFP 113 D – RA    on    on  
non shorting



MFP 213 N – RA    on    on  
non-shorting



MFP 213 P – RA    on on on  
shorting





# Miniature Slide Switches

## Specifications:

Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	non-shorting
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 3 sec, 230° C ± 5° C

## Models: Switching functions

MFP 102 D	on	on				
MFP 191 D	on	on				
MFP 201 N	on	on				
MFP 211 N	on	on				

# Miniature Slide Switches

## Specifications:

Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC; MFPP 130 – RA: 250 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations; MFPP 130 – RA > 100 000
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 3 sec, 230° C ± 5° C

## Models:

Model	Switching functions	Terminal Diagram	Dimensions (mm)	Terminal Spacing
MFP 101 D – RA non-shorting	on on			
MFP 121 D – RA non-shorting	on on			
MFP 201 N – RA non-shorting	on on			
MFPP 130 – RA	on on on			



# Miniature Slide Switches


## Specifications:

Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 3 sec, 230° C ± 5° C

## Models: Switching functions


MFP 221 N  
non-shorting

on on




MFP 223 P  
shorting

on on on

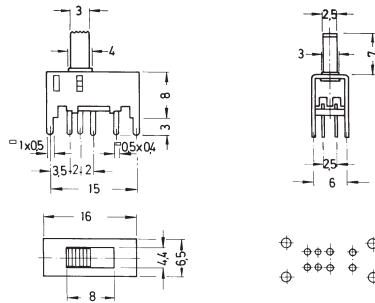



MFP 231 P  
shorting

on on on

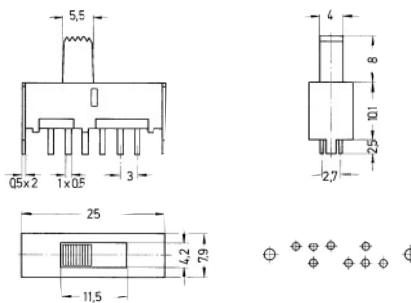

MFP 291 N  
non-shorting

on on

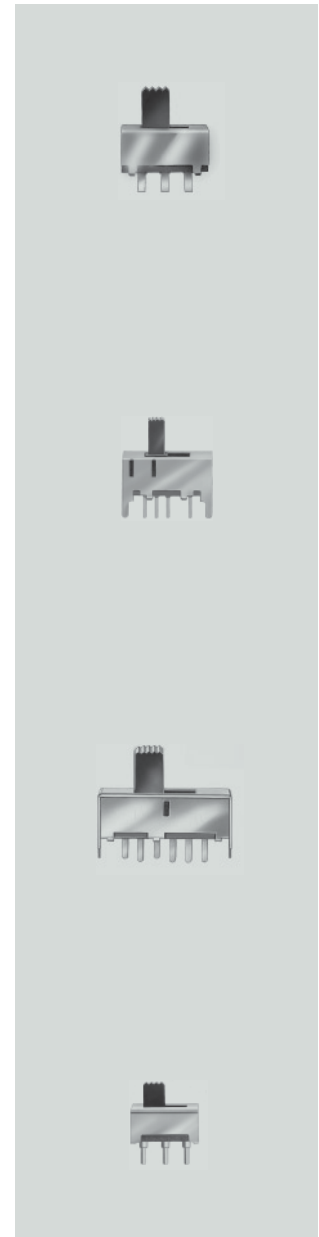

# Miniature Slide Switches

## Specifications:

Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	hand-soldering – max.: 5 sec, 270° C

## Models:

	Switching functions				
MFS 121 D non-shorting	on on				
MFS 131 D non-shorting	on on				
MFS 201 N non-shorting	on on				
MFS 231 P shorting	on on on				