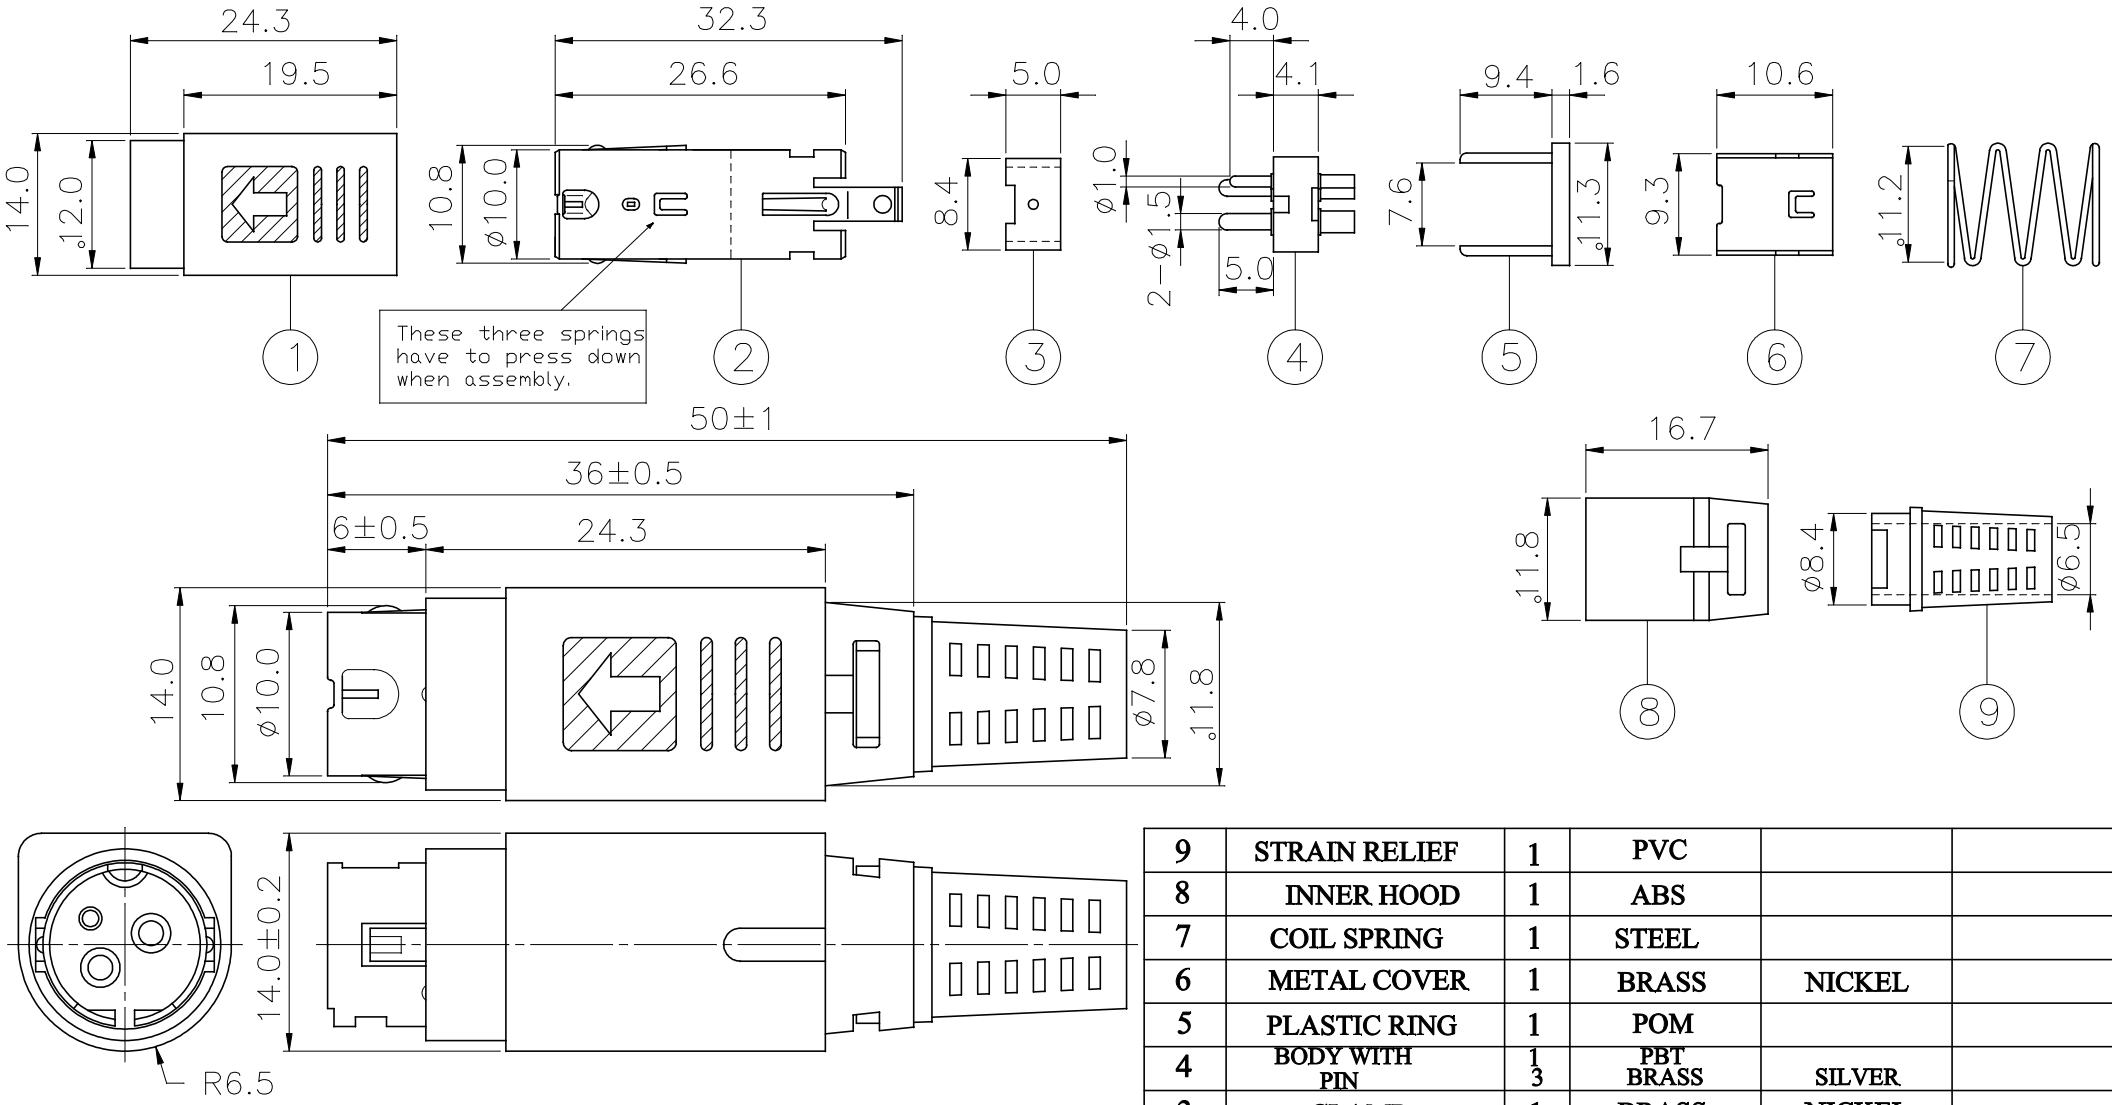

SPECIFICATIONS:

1. RATING : PIN A&B : 20V DC 7.5A MAX. (PIN DIA. 1.5 ∅)
   PIN C : 20V DC 1A MAX. (PIN DIA. 1.0 ∅)
2. INSULATION RESISTANCE : 50M OHM MIN. AT 250V DC.
3. DIELECTRIC STRENGTH : 250V AC / 1 MINUTE.

***Unless other specified, the tolerance is ±0.3mm

ARRANGEMENT



(FRONT VIEW)

9	STRAIN RELIEF	1	PVC		
8	INNER HOOD	1	ABS		
7	COIL SPRING	1	STEEL		
6	METAL COVER	1	BRASS	NICKEL	
5	PLASTIC RING	1	POM		
4	BODY WITH PIN	1 3	PBT BRASS	SILVER	
3	CLAMP	1	BRASS	NICKEL	
2	METAL SLEEVE	1	BRASS	NICKEL	
1	OUTER HOOD	1	ABS		
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

REVISION	APPROVAL BY	CHECKED BY	DRAWD BY	UNITS
			Kan 88.9.18	mm
	PROJECTION	PRODUCT	DRAWING NO.	SCALE / PAGE
			DP-002- Single Arrow	2/1,3/1

UNITOP ELECTRONICS CO., LTD.