

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: High Temperature Plastic UL94V-2




Electrical Characteristics:

Dielectric Withstanding Voltage: AC 1500V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 100V.

Operating Temperature: -25°C~+105°C .

***RoHS Compliant**

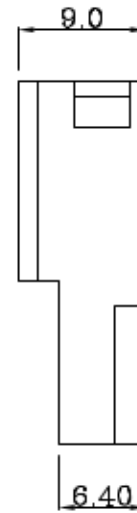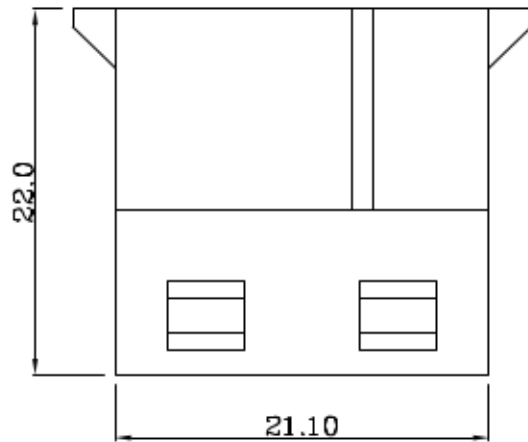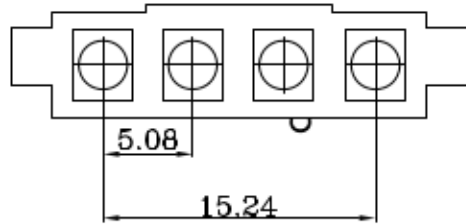

4874- 04 F H B
 Series No.of Position Female Housing Bulk Package

Tolerances x = ±0.5 .x = ±0.25 .xx = ±0.15	Drawn No.	4874H02001		Title: 4874 Series Housing Female Type Pitch 5.08mm						
	Projection									
	Unit mm	Scale	1:1							
	Drawn By	Shi 05/11'11								
				① 704						
					P/N: 4874-04FHB					
					SHEET	1/1	Ver. No.	A4		